

## INSTALLATION INSTRUCTIONS DRANJER™ D-R2 Retrofit Floor Drain Model

The Dranjer™ is placed under the existing floor drain cover plate. The cover plate is then replaced.

The Dranjer™ D-R2 fits all floor drains from 2 in. to 8 in. A larger floor drain unit, model J-RH5 fits bigger drains, and model J-S5 is available for sumps. See your retailer for these units.

### TO INSTALL THE DRANJER™

1. Remove the floor drain cover plate from the hole.
2. Clean the rim of the hole.
3. Lay a bead of caulking compound around the rim of the hole as shown in Figure 1.
4. Hold the Dranjer™ and the cover plate together so that their centers are aligned and the cover plate is on top, as shown in Figures 2 and 3.
5. Lower the Dranjer™ and the cover plate back into the hole. Push the floor drain cover plate back into position, pinching the rubber flange of the Dranjer™ underneath it as shown in Figure 4.
6. Stand on top of the floor drain cover plate to set it firmly.
7. Trim off the surplus rubber around the edge of the flange with a knife, as shown in Figure 5.
8. Leave a heavy weight on top of the floor drain cover plate until the caulking compound has dried.
9. Pour about one pint of water into the drain to fill the Dranjer™.

*Note:* If dirty water flows routinely through the Dranjer™, deposits may stop the sliding ring seal from working properly. Regular cleaning of the Dranjer™ will prevent this.




Fig. 1

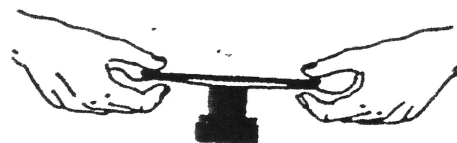


Fig. 2

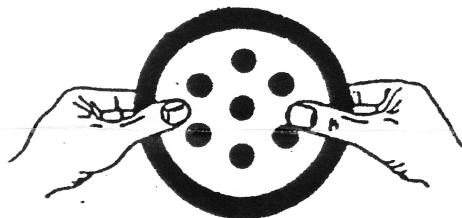


Fig. 3




Fig. 4




Fig. 5

 **Dranjer** Corporation

Protecting your Family's Health